


XP SERIES

LT1000

LUMBER JACK

Owner's Manual & Safety Instructions


TORCH

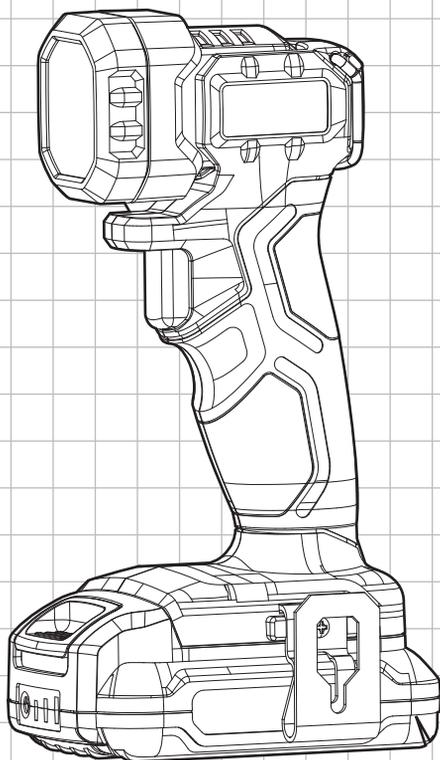

⚠️ WARNING

Read this manual before using this product.
Failure to do so can result in serious injury.
SAVE THIS MANUAL.



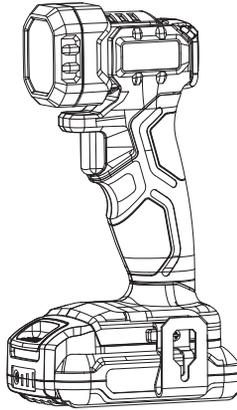

CATALOG

| | |
|---|----|
| 1. Work Area Safety | 01 |
| 2. Electrical Safety | 01 |
| 3. Personal Safety | 01 |
| 4. Battery tool use and care | 02 |
| 5. Product Description and Specifications | 02 |
| 6. Assembly | 03 |
| 7. Operation | 03 |
| 8. Maintenance and Cleaning | 04 |
| 9. Transport | 04 |
| 10. Seller Details | 04 |

General Power Tool Safety Warnings

WARNING: Read all safety warnings and instructions. Failure to follow the warnings and instructions may result in electric shock, fire and/or serious injury.

Save all warnings and instructions for future reference.

Please read and observe all safety and general instructions included with the battery or with the power tool supplied with the battery.

Handle the worklight with care. The worklight produces intense heat which increases the risk of fire and explosion.

Do not work with the worklight in potentially explosive areas.

Do not continue to press the On/Off switch after the worklight has been automatically switched off. The battery can be damaged. Ensure that the battery is charged and that the worklight has cooled before switching on the worklight again.


Use only original accessories.

The light source cannot be replaced. If the light source is defective, the entire cordless worklight must be replaced.

Remove the batteries from the worklight before carrying out any work on the worklight (e.g. assembly, maintenance, etc.) as well as when transporting and storing the worklight. There is risk of injury from unintentionally pressing the on/off switch.

Do not direct the light beam at persons or animals and do not stare into the light beam yourself (even from a distance).

Do not use the worklight in road traffic. The worklight is not permitted for illumination in road traffic.



Keep the minimum distance between the cordless worklight and all illuminated surfaces and objects. Illuminated objects may overheat if this distance is not maintained.

In case of damage and improper use of the battery, vapors may be emitted.

Ensure the area is well-ventilated and seek medical attention should you experience any adverse effects. The vapours may irritate the respiratory system.

If used incorrectly, liquid may be ejected from the battery; avoid contact. If contact accidentally occurs, rinse off with water. If the liquid comes into contact with your eyes, seek additional medical attention. Liquid ejected from the battery may cause irritation or burns.

The battery can be damaged by pointed objects such as nails or screwdrivers or by force applied externally. An internal short circuit may occur, causing the battery to burn, smoke, explode or overheat.

When the battery is not in use, keep it away from paper clips, coins, keys, nails, screws or other small metal objects that could make a connection from one terminal to another. A short circuit between the battery terminals may cause burns or a fire.

Do not open the battery. There is a risk of short-circuiting.

Only use the battery with products from the manufacturer. This is the only way in which you can protect the battery against dangerous overload.



Protect the battery against heat, e.g. against continuous intense sunlight, fire, water, and moisture. There is a risk of explosion.



Do not cover the lamp head while the cordless worklight is operating. The lamp head warms up during operation and can cause burns if this heat accumulates.

Do not allow children to use the cordless worklight. It is intended for professional use. Children can unintentionally blind themselves or other persons.



NOTE: Do not look into the light beam for prolonged periods. The optical radiation may harm your eyes.

The term "power tool" in the warnings refers to your mains-operated (corded) power tools or battery-operated (cordless) power tools.

Specific Safety rules of Worklight

This cordless worklight is not intended for use by children and persons with physical, sensory or mental limitations or a lack of experience or knowledge. This cordless worklight can be used by children aged eight or older and by persons with physical, sensory or mental limitations or a lack of experience or knowledge if a person responsible for their safety supervises them or has instructed them in the safe operation of the cordless worklight and they understand the associated dangers. Otherwise, there is a danger of operating errors and injuries.

Only charge the batteries using chargers recommended by the manufacturer. A charger that is suitable for one type of battery may create a risk of fire when used with a different battery.

Avoid dust accumulation at the workplace. Dust can easily ignite.

Product Description and Specifications


Intended Use

The cordless worklight is intended for mobile illumination in a limited space and for a limited time in indoor and outdoor areas and is not suitable for general room lighting.

b. Technical Specification

| | | |
|---------------|------|--------------|
| Model | | LT1000 |
| Rated Voltage | | 20V \equiv |
| Max.output | Low | 500Lm |
| | High | 1000Lm |

c. Function Description

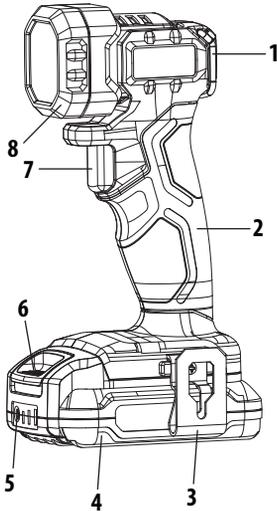

1. Rotating and swiveling lamp head
2. Handle
3. Belt clip
4. Battery
5. Power-on indicator
6. Battery push button
7. On/Off switch

Assembly

Installing the Battery

Press the button of the battery, and then insert the charged battery from the front into the base of the power tool. Push the battery completely into the base until the red stripe can no longer be seen and the battery is securely locked.

NOTE: Use only original batteries with the voltage listed on the nameplate of your power tool. Using other batteries can lead to injuries and pose a fire hazard.

Removing the Battery

Press the button of the battery, and then pull the battery from the machine into the base of the power tool.

NOTE: Please remove battery from the machine before operate the following installations.

Operation

Switching On/Off

The worklight generates a beam of light that emanates from the lamp head.

To **switch on** the worklight, press the on/off switch.

To **dim** the light of the worklight, press the on/off switch again.

To **flash** the worklight, press the on/off switch third time.

To **switch off** the worklight, press the on/off switch again.

To save energy, only switch the worklight on when you are using it.

Utility hook

You can use the utility hook to attach the worklight to an object.

Swivelling the lamp head

NOTE: The lamp head can be swiveled in any direction.

The lamp head can be swivelled up to 110° to suit the application.

Maintenance and Cleaning

The light source cannot be replaced. If the light source is defective, the entire worklight has to be replaced.

The worklight is maintenance-free and does not contain any parts that need to be replaced or maintained.

Only clean the worklight's plastic lens with a dry, soft cloth to prevent damage. Do not use any detergents or solvents.

If the worklight should fail despite the care taken in manufacturing and testing procedures, the repair should be carried out by an after-sales service centre for power tools.

Transport

Turn the motor off and disconnect the mains plug or battery. While transporting, be careful not to drop, or shock the machine. For transport, the machine has to be fixed against slipping and tipping over. Do not place objects on the machine.

Meaning of crossed-out wheeled dustbin:



Do not dispose of electrical appliances as unsorted municipal waste, use separate collection facilities. Contact your local government for information regarding the collection systems available. If electrical appliances are disposed of in landfills or dumps, hazardous substances can leak into the groundwater and get into the food chain, damaging your health and well-being.

CE DECLARATION OF CONFORMITY

TOOLSAVE

Unit C, Manders Ind. Est.,

Old Heath Road, Wolverhampton,

WV1 2RP.

Tel: 01902 450 470

Declares that the Torch (LT1000)
Is compliance with the regulations included in the
Directives:2006/42/EC

EC DECLARATION OF CONFORMITY

Certificate for EC-type examination delivered by Interk Testing Services Hangzhou 16

No. 1 Ave., Xiasha Economic Development District, Hangzhou 310018, China

(Verification No.:150500566HZH-V1)

Person who declares: **Bill Evans**

CE

06.26.2019

The Director



LUMBER JACK

LUMBERJACK TOOLS
UNIT C MANDERS INDUSTRIAL
ESTATE WOLVERHAMPTON WV1
2RP

WWW.LUMBERJACKTOOLS.CO.UK